nachik

Woven

In,Out & All about Outstanding Performance

WOVEN

nachik

Outdoor, Water repellent, Anti-bacterial, Anti-mildew, IMO-certified

Composition: 80% PVC, 20% Polyester
Width:138cm
Weight: 700 gsm
Thickness: 1.2 mm ± 0.1 mm
Abrasion resistance: (BS EN ISO 12947-2/BS EN 14465: 2003 Annex a): >100,000
Change in shade @ 3000 revs: 4-5
Colour fastness to rubbing (dry): BS EN ISO 105 x 12: 2016: 4-5
Colour fastness to rubbing (wet): BS EN ISO 105 x 12: 2016: 3-4
Colour fastness to light: BS EN ISO 105 B02: 2014: 8+
Martindale pilling - BS EN ISO 12945-2: 2000: 4-5
Tear Strength: (BS EN ISO-3377-1:2002): >20N
Flexing Resistance: (BS EN ISO 5402:2002): 50,000 cycles, Pass
Resistance to cold crack: (BS EN ISO 17233:2002): No cracking, Pass
Anti- bacterial ASTM G21: Pass
UV Stability (ASTM D4329-05): 1000 hours, Pass
Hydrolysis (Jungle testing): DIN EN ISO 32 100/ DIN 53 359: 7 years
Flame retardant: BS 5852: Part 1: 2014, Ignition source 0 (Cigarette): Pass
Flame retardant: BS 5852: Part 1: 2014, Ignition source 1 (Match): Pass
IMO: 2010 FTP Code Part 8 Appendix 1 Fire test procedures for the ignitability by smoker's materials of upholstered composites for seating – Pass
REACH

Clean locally with damp cloth and mild detergent.

.

1

2

3

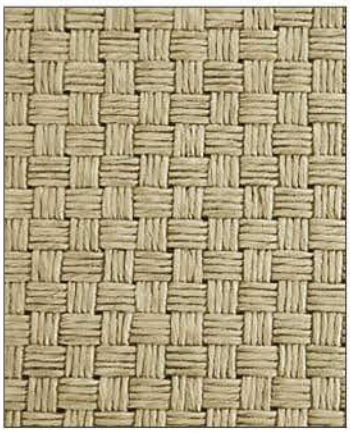

4

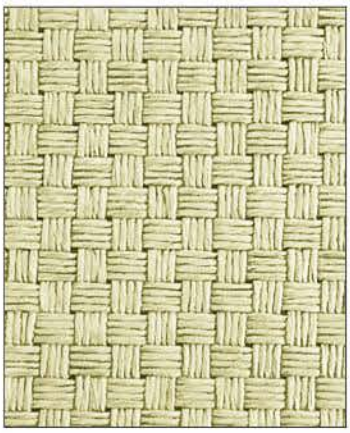

5

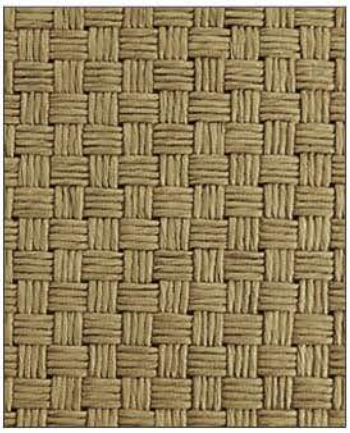

6

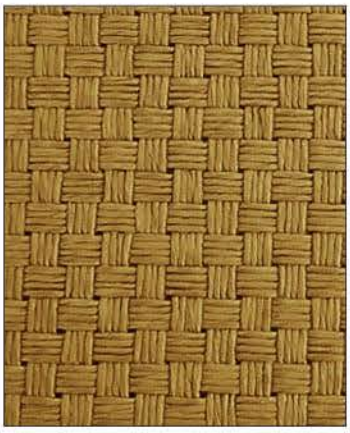

7

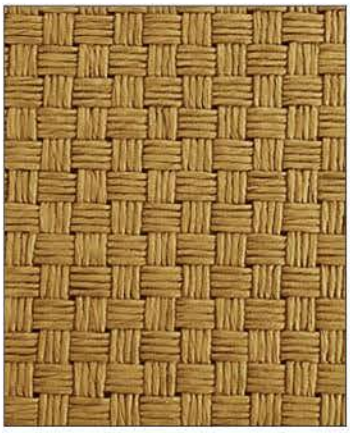

8

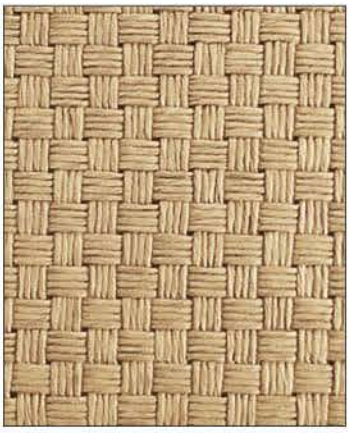

9

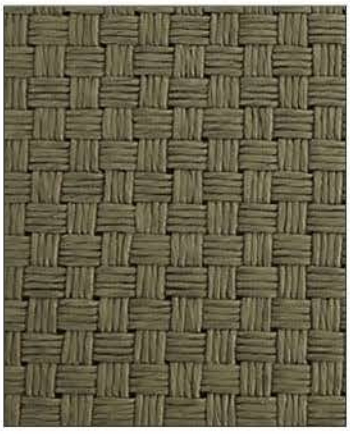

10

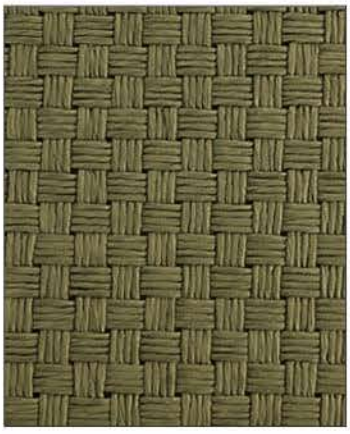

11

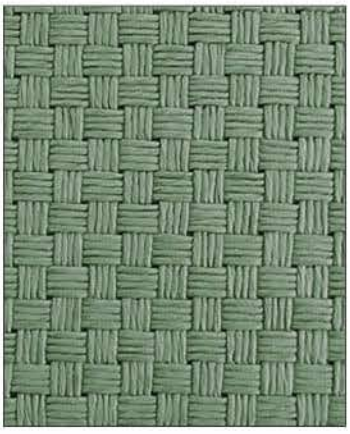

12

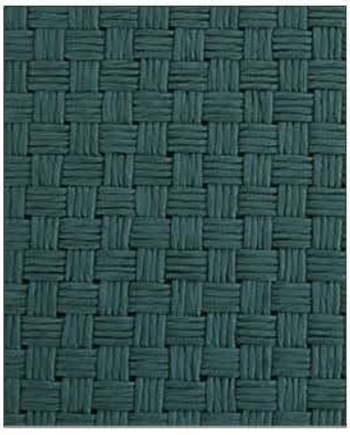

13

14

15

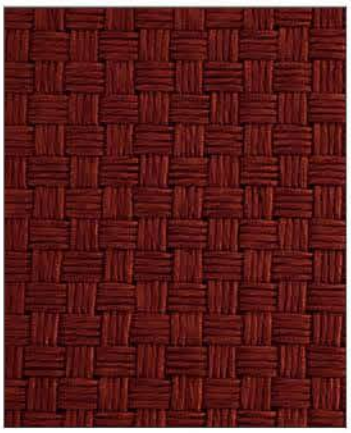

16

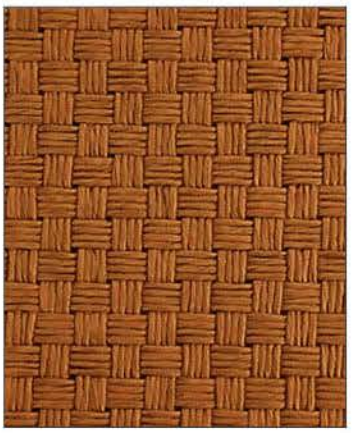

17

18

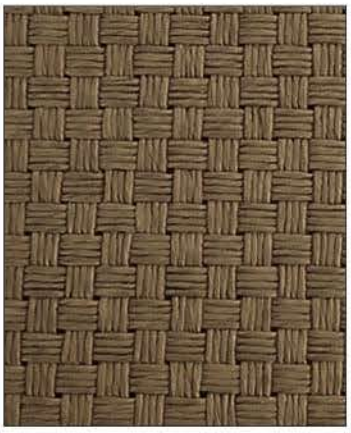

19

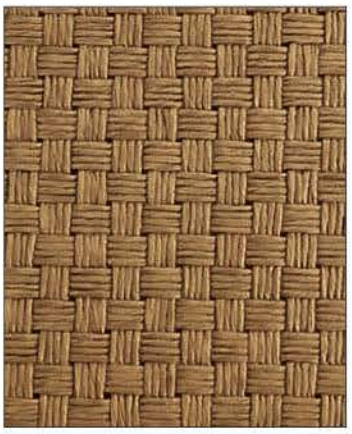

20

21

22

23

24

25

26

27